

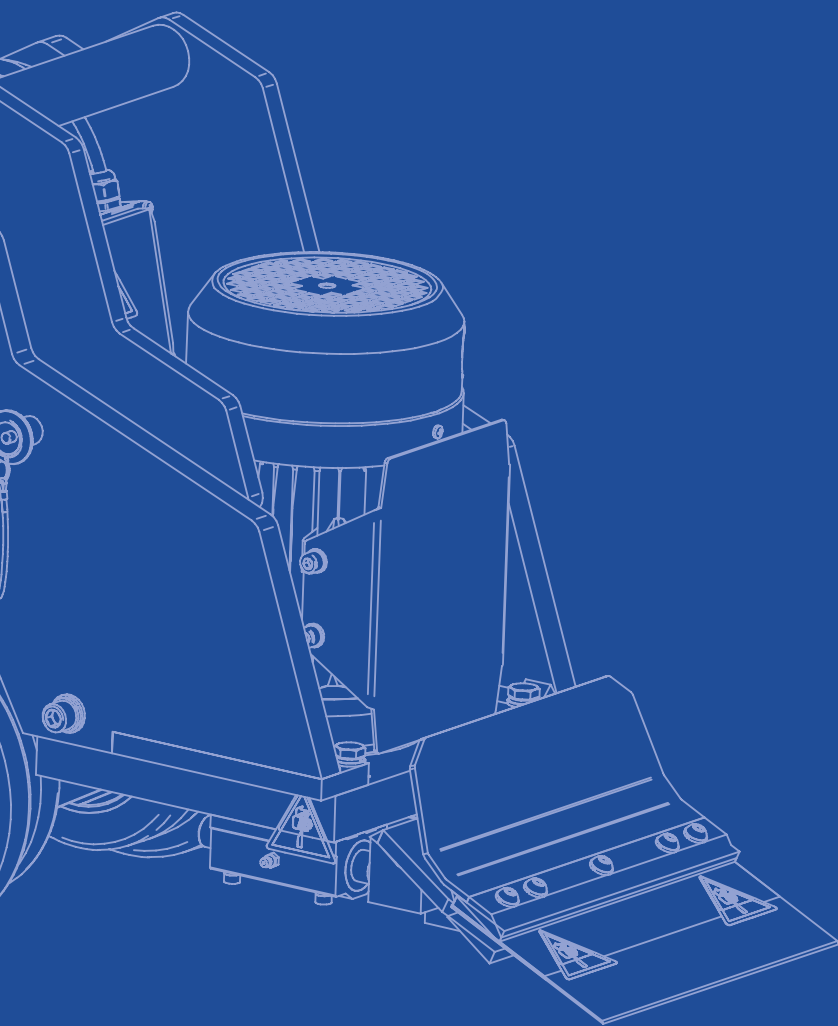
FLOOR SCRAPERS

PRODUCT
CATALOGUE



**von
arx**®
TRUE QUALITY SINCE 1941

HAND GUIDED, SELF-PROPELLED, MOTOR DRIVEN POWER TOOLS WITH OSCILLATING STRIPPER HEAD WHICH IS DESIGNED TO REMOVE LAYERS OF FLOORING MATERIAL



The machine works under its weight on the floor and it is to be led by an operator.

The scraping angle is to be adjusted in 3 positions with special blade adjuster strips according to the desired application. The adjustable weight of the machine gives the option to set up the exact tool pressure in front.

The handle bar is also adjustable in height. The self-driven function is activated by a lever on the handle with pedal locking driving forward. Backward drive option is hand-driven with unlocked pedal.

Floor scrapers • SC 20



SC 20

Floor scraper

Article code	Power	Consumption
800071	230 V / 50 Hz	8.3 A
800078	115 V / 50 Hz	17.2 A
800079	115 V / 60 Hz	17.2 A

Physical parameters	
Weight kg / lbs	35.9 kg / 79 lbs
Dimensions mm / inch	372 × 1008 × 885 mm 14.6 × 39.6 × 34.8"

Field of application
The floor scraper with its different blades is extremely useful for: <ul style="list-style-type: none">• Strip floor coverings• Lift carpet tiles and foam backed carpets• Remove felt, underlay• Linoleum and vinyl flooring• Cork tiles and matting• Ceramic and granite tiles
The machine works off screed, latex, concrete or wood surfaces and will lift floor coverings leaving a minimum of residue and backing. It can also be used to create a distressed effect on hardwood flooring.

Key features	
Working width	200 - 230 mm / 7.8 - 9.1"
Distance to wall	88 mm / 3.5" (basic blade)
El. motor drive size	90 L
Power	1.5 kW
Speed	2800 RPM
Motor protection switch	25 A / 115 V, 13.5 A / 230 V
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98 db(A)
Vibration level	9.76 m/s ²
Protection type	IP 55



SC 25

Floor scraper

Article code	Power	Consumption
800074	230 V / 50 Hz	10.9 A
800081	115 V / 50 Hz	22.4 A
800082	115 V / 60 Hz	22.2 A

Physical parameters	
Weight kg/lbs	155 kg / 342 lbs
Dimensions mm/inch	500 × 1120 × 825 mm 19.7 × 44.1 × 32.5"

Field of application
The floor scraper with its different blades is extremely useful for: <ul style="list-style-type: none">• Strip floor coverings• Lift carpet tiles and foam backed carpets• Remove felt, underlay• Linoleum and vinyl flooring• Cork tiles and matting• Ceramic and granite tiles
The machine works off screed, latex, concrete or wood surfaces and will lift floor coverings leaving a minimum of residue and backing. It can also be used to create a distressed effect on hardwood flooring.

Key features	
Working width	250 - 270 mm / 9.8 - 10.6"
Distance to wall	110 mm / 4.3" (basic blade)
El. motor size	90 L
Power	1.5 kW
Speed	2800 RPM
Motor protection switch	25 A / 115 V, 13.5 A / 230 V
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98.0 db(A)
Vibration level	8.8 m/s2
Protection type	IP 55



SC 35

Floor scraper

Article code	Power	Consumption
800077	230 V / 50 Hz	10.9 A
800083	115 V / 50 Hz	22.4 A
800084	115 V / 60 Hz	22.2 A

Physical parameters	
Weight kg/lbs	234 kg / 516 lbs
Dimensions mm/inch	500 × 1120 × 882 mm 19.7 × 44.1 × 34.7"



Field of application
The floor scraper with its different blades is extremely useful for: <ul style="list-style-type: none">• Strip floor coverings• Lift carpet tiles and foam backed carpets• Remove felt, underlay• Linoleum and vinyl flooring• Cork tiles and matting• Ceramic and granite tiles
The machine works off screed, latex, concrete or wood surfaces and will lift floor coverings leaving a minimum of residue and backing. It can also be used to create a distressed effect on hardwood flooring.

Key features	
Working width	350 - 370 mm / 13.8 - 14.6"
Distance to wall	60 mm / 2.4" (basic blade)
El. motor size	90 L
Power	1.5 kW
Speed	2800 RPM
Motor protection switch	25 A / 115 V, 13.5 A / 230 V
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98.0 db(A)
Vibration level	8.1 m/s2
Protection type	IP 55










SPARE PARTS

SC 20


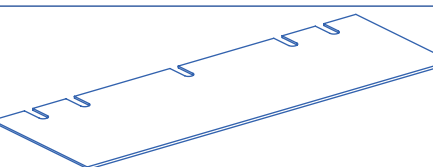
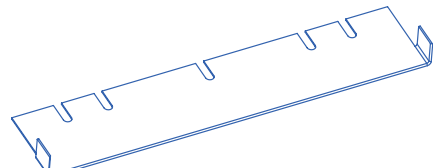
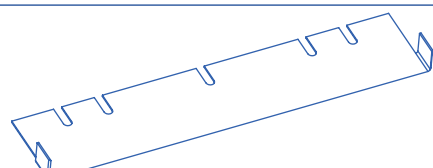
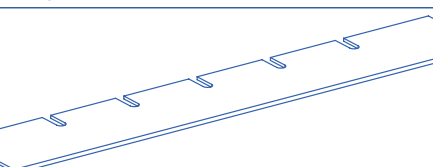


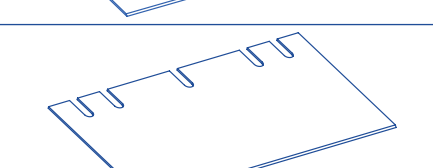
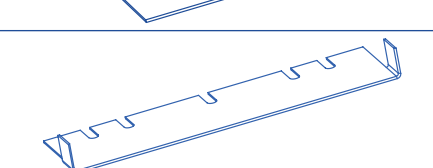
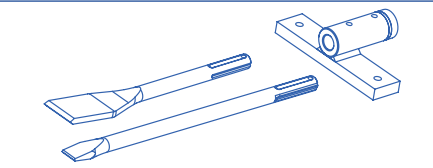
Basic blade 400110	200×100×1.5 mm 7.9×3.9×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
U-Blade 400215	230×100×2 mm 9.1×3.9×0.08"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting

SC 25

Basic blade 400123	250×80×1.5 mm 9.8×3.1×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
Long blade 400238	250×130×1.5 mm 9.8×5.1×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
U-blade 400213	270×80×1.5 mm 10.6×3.1×0.06"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting
Debris blade 400217	200×80×2.5 mm 7.9×3.1×0.1"		Application: <ul style="list-style-type: none">Hard glued floor coveringsDebris
Basic blade 400110 (Optional)	200×100×1.5 mm 7.9×3.9×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
U-Blade 400215 (Optional)	230×100×2 mm 9.1×3.9×0.08"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting
Chisel set 400253 (Optional)	Chisel holder Chisel: 25×280 mm / 0.98×11" Chisel: 50×300 mm / 1.98×11.8"		Application: <ul style="list-style-type: none">TilesParquetHard debris



SC 35

Basic blade 400171	350×80×1.5 mm 13.8×3.1×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
Long blade 400218	350×130×1.5 mm 13.8×5.1×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
U-blade bottom edge 400214	370×80×1.5 mm 14.6×3.1×0.06"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting
U-blade top edge 400216	370×80×1.5 mm 14.6×3.1×0.06"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting
Wide blade 400219	450×80×2.5 mm 17.7×3.1×0.1"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
Debris blade 400217	200×80×2.5 mm 7.9×3.1×0.1"		Application: <ul style="list-style-type: none">Hard glued floor coveringsDebris
Basic blade 400123 (Optional)	250×80×1.5 mm 9.8×3.1×0.06"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
Long blade 400238 (Optional)	200×130×1.5 mm 7.9×5.1×0.1"		Application: <ul style="list-style-type: none">Strip floor coveringsLift carpet tiles and foam backed carpetsCork tiles and matting
U-blade 400213 (Optional)	270×80×1.5 mm 10.6×3.1×0.1"		Application: <ul style="list-style-type: none">Remove felt, underlayLinoleum and vinyl flooringMatting
Chisel set 400253 (Optional)	Chisel holder Chisel: 25×280 mm / 0.98×11" Chisel: 50×300 mm / 1.98×11.8"		Application: <ul style="list-style-type: none">TilesParquetHard debris

VON ARX EOOD

20, Nedyalka Shileva street
South Industrial zone
Trakiya 4023, Plovdiv Bulgaria

Phone: +359 32 940553
E-mail: order@vonarx.com
E-mail: info@vonarx.com

